

## DOES EVERYTHING ROTATE AROUND PRECISION? NO PROBLEM WITH MICROMAR.



The latest information on MICROMAR products can be found on our website:  
[www.mahr.de/en/Home](http://www.mahr.de/en/Home), WebCode 20127

► | Micrometers belong alongside calipers to the most frequently used hand measuring instruments. With their precision ground spindle, their carbide tipped measuring faces and their robust frame construction the modern micrometer from the Micromar series ensures maximum precision and a long working life. Our mechanical micrometers are extremely reliable and are easy to read due to the scales having a satin chrome finish, thus ensuring accuracy and user comfort. Our digital micrometers unite both the highly renowned mechanical precision from Mahr with most modern electronics. These digital micrometers offer simple operation with an error free reading as well as problem-free data transmission to an external evaluation instrument. Micromar 40 EWR, the newest generation of waterproof digital micrometers ensures that even in the most difficult workshop conditions precise and reliable results are obtained. A speciality of Mahr is the micrometer with a dial comparator, with its built-in dial comparator, stationary anvil and constant measuring force they are particularly well suited for rapid measurements and highly precise serial measurements.



# ► | Micromar. Micrometers

## Overview

### Micromar Micrometers

3- 2

## Micrometers

### **Micromar 40 EWR / 40 ER / 40 EWS / 40 EWV**

3- 4

With a Digital Display

### **Micromar 40 A / 40 W**

3-12

With Scales

### **Micromar 40 F / 40 T / 40 TS**

3-16

With a Dial Comparator

### **Micromar 40 AB / 40 AS / 40 AR / 40 AW / 40 SM**

3-19

With Special Measuring Faces

### **Micromar 40 Z**

3-22

For Gear and Thread Measurement

### **Accessories for Micrometers**

3-24

## Inside Micrometers

### **Micromar 44 F / 44 Cms / 44 CB / 44 CZ**

3-25

Inside Micrometers with 2-Point Contact

### **Micromar 44 A / 44 EWR / 844 A**

3-31

Self-Centering Inside Micrometers / Measuring Pistols

## Depth Micrometers

### **Micromar 45 T**

3-35

With a Line Scale (Vernier)

## Micrometer Heads

### **Micromar 46 EWR / 46 / 46H**

3-36

With Digital Display or Scales (Vernier)

# Micromar. Micrometer


## OVERVIEW

### Micromar - Design Features



### Reading example:

Micrometer with 0.01 mm-divisions



Sleeve  
Thimble

Measuring result

2.5

0.28

2.78 mm

### Micromar - Types of Micrometers

**Mahr** - Micrometers are available with the following means of indication:

- a) Digital Micrometer with digital display



- b) Mechanical Micrometer with scale and dial



- c) Mechanical Micrometer with scale



### Error limits G according to DIN 863-1

Measuring range mm	Error limit G µm	Measuring force N
0 - 25	4	5 - 10
25 - 50	4	5 - 10
50 - 75	5	5 - 10
75 - 100	5	5 - 10
100 - 125	6	5 - 10
125 - 150	6	5 - 10
150 - 175	7	5 - 10
175 - 200	7	5 - 10
200 - 225	8	5 - 10
225 - 250	8	5 - 10
250 - 275	9	5 - 10
275 - 300	9	5 - 10
300 - 325	10	5 - 10
325 - 350	10	5 - 10
350 - 375	11	5 - 10
375 - 400	11	5 - 10
400 - 425	12	5 - 10
425 - 450	12	5 - 10
450 - 475	13	5 - 10
475 - 500	13	5 - 10

## Micromar - Variations

a) Micrometer



b) Micrometer for inside dimensions



c) Micrometer for depth measurement



d) Micrometer Head



## Function keys of Digital Micrometers

Functions	Type
PR	Enter a numerical value (Reference Setting)
mm/in	Switch between mm/inch
0/ABS	Set display to either 0.000 mm or <b>.0000"</b> for relative measurement / set to a reference or preset value (PR)
DATA	Data transmission

Legend:

- 
- \*
- ABS
- USB
- RS232C

\* For digital micrometers with a data output

# Micromar. Digital Micrometer Micromar 40 EWR

## WATERPROOF MICROMETERS

► I With the digital waterproof Micrometer **Micromar** 40 EWR, precise and reliable results are obtained even in the most difficult conditions.

The high-contrast display with 8.5 mm high digits enables accurate, fatigue free reading of the measurement results.

**Absolute**-Function:  
Micrometer can be set in any position to 0.000 mm / **.0000"** without the reference to the Preset value being lost

ABS

 The **Reference-Lock-Function** prevents operating error caused by accidental usage of the operating buttons.

Stainless steel, hardened spindle

Sturdy hard lacquered steel frame

The new Reference system is extremely energy efficient as when the caliper is in standby mode; almost no power is required, thus **extending the life of the battery to up to 50%**.




The **ergonomically formed** and **thermally insulated handle** as well as the integrated ratchet in the thimble ensures both trouble free handling and accurate measurement results.



Code Initial	IP	International Protection
First Numeral	<b>6</b>	Dust-tight
Second Numeral	<b>5</b>	Protected against powerful water jets



Protection class **IP65** in accordance to IEC 60529, the water proof measuring system **FPS** (Fluid Protected measuring System) with a sealed housing.



**Universal SPC-interface** (optional). You have a choice of **MarConnect** data outputs, select either **USB**, **Digimatic** or **Mahr Opto RS232**

## Digital Micrometer Micromar 40 EWR with data output



**REFERENCE**

### Features

#### Functions:

RESET (Zero setting the display for Relative measurement)  
ABS (Switch between Relative and Absolute measurement)  
mm/inch  
Reference-Lock/Unlock  
PRESET (Reference setting)

DATA (Data transmission via connection cable)

- Immediate measurement due to the Reference system
- MarConnect data output, choose alternatively USB OPTO RS232C Digimatic


- High contrast Liquid Crystal Display with 8.5 mm high digits
- Hard lacquered steel frame, heat insulated
- Spindle and anvil are carbide tipped
- Spindle is made of stainless steel, hardened throughout and ground

- Ratchet is integrated in the thimble
- Rapid drive
- Supplied with:  
Case, battery, operating instructions and setting standard (from measuring range 25-50 mm / 1-2")

### Technical Data

	Measuring range		Resolution	Error limit G *	Spindle thread pitch	Data output	Order no.
	mm	(inch)	mm / inch	µm	mm	MarConnect USB	
40 EWR	0 - 25	(0 - 1")	0.001 / .00005"	2	0.635	●	4151705
40 EWR	25 - 50	(1 - 2")	0.001 / .00005"	2	0.635	●	4151706
40 EWR	50 - 75	(2 - 3")	0.001 / .00005"	3	0.635	●	4151707
40 EWR	75 - 100	(3 - 4")	0.001 / .00005"	3	0.635	●	4151708
40 EWR	100 - 125	(4 - 5")	0.001 / .00005"	5	0.635	●	4151740
40 EWR	125 - 150	(5 - 6")	0.001 / .00005"	5	0.635	●	4151741
40 EWR	150 - 175	(6 - 7")	0.001 / .00005"	6	0.635	●	4151742
40 EWR	175 - 200	(7 - 8")	0.001 / .00005"	6	0.635	●	4151743

\* at fixed zero point (better than DIN 863-1)

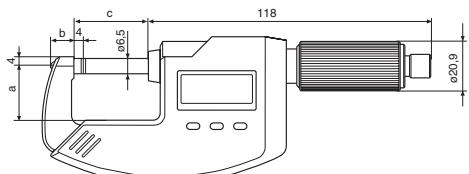

### Dimensions

	mm	a	b	c		Order no.
0	- 25 mm / 0-1"	23	9.5	31.5		
25	- 50 mm / 1-2"	32	11.5	57		
50	- 75 mm / 2-3"	44	13.5	82		
75	- 100 mm / 3-4"	57	15.5	107		
100	- 125 mm / 4-5"	73	17	132.5		
125	- 150 mm / 5-6"	85	17	157.5		
150	- 175 mm / 6-7"	97	17	182.5		
175	- 200 mm / 7-8"	110	17	207.5		

### Accessories

Battery 3V, type CR 2032		4102520
Data Connection Cable USB (2 m)	16 EXu	4102357
Data Connection Cable Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr	4102410
Data Connection Cable Digimatic (2 m), Flat plug 10-pin	16 Ewd	4102915
Accessories for Data Processing see Chapter 11		

## Digital Micrometer Micromar 40 EWR without data output



**REFERENCE**

### Features

#### Functions:


RESET (Zero setting the display for Relative measurement)  
ABS (Switch between Relative and Absolute measurement)  
mm/inch  
Reference-Lock/Unlock  
PRESET (Reference setting)

- Immediate measurement due to the Reference system
- High contrast Liquid Crystal Display with 8.5 mm high digits
- Hard lacquered steel frame, heat insulated
- Spindle and anvil are carbide tipped
- Spindle is made of stainless steel, hardened throughout and ground
- Ratchet is integrated in the thimble
- Rapid drive
- Supplied with:  
Case, battery, operating instructions

### Technical Data

	Measuring range		Resolution	Error limit G *	Spindle thread pitch	Data output	Order no.
	mm	(inch)	mm / inch	µm	mm		
<b>40 EWR</b>	0 - 25	(0 - 1")	0.001 / .00005"	2	0.635	—	<b>4151721</b>

\* at fixed zero point (better than DIN 863-1)

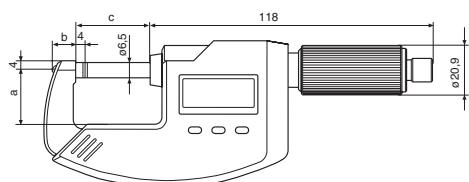

### Dimensions

mm	a	b	c
0 - 25 mm / 0-1"	23	9.5	31.5

### Accessories

Order no.
<b>Battery 3V, type CR 2032</b> 4102520

## Digital Micrometer Set Micromar 40 EWR



**REFERENCE**

### Features

#### Functions:

RESET (Zero setting the display for Relative measurement)  
ABS (Switch between Relative and Absolute measurement)  
mm/inch  
Reference-Lock/Unlock  
PRESET (Reference setting)

DATA (Data transmission via connection cable)

- Immediate measurement due to the Reference system
- MarConnect data output, choose alternatively USB OPTO RS232C Digimatic

- High contrast Liquid Crystal Display with 8.5 mm high digits
- Hard lacquered steel frame, heat insulated
- Spindle and anvil are carbide tipped
- Spindle is made of stainless steel, hardened throughout and ground

- Ratchet is integrated in the thimble
- Rapid drive
- Supplied with:  
Custom fitted plastic case, battery, operating instructions and standards 25 mm, 50 mm and 75 mm

### Technical Data

	Measuring range		Resolution mm / inch	Spindle thread pitch mm	Number of Micrometers	Order no.
	mm	(inch)				
40 EWR	0 - 100	(0 - 4")	0.001 / .00005"	0.635	4	4151709

### Accessories

	Order no.
Battery 3V, type CR 2032	4102520
Data Connection Cable USB (2 m)	16 EXu
Data Connection Cable Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr
Data Connection Cable Digimatic (2 m), Flat plug 10-pin	16 Ewd
	4102357
	4102410
	4102915

Accessories for Data Processing see Chapter 11

## Digital Micrometer Micromar 40 ER without data output



REFERENCE

### Features

#### Functions:


RESET (Zero setting the display for Relative measurement)  
 ABS (Switch between Relative and Absolute measurement)  
 mm/inch  
 Reference-Lock/Unlock  
 PRESET (Reference setting)

- Immediate measurement due to the Reference system
- High contrast Liquid Crystal Display with 8.5 mm high digits
- Hard lacquered steel frame, heat insulated
- Spindle and anvil are carbide tipped
- Spindle is made of stainless steel, hardened throughout and ground
- Ratchet is integrated in the thimble
- Rapid drive
- Supplied with:  
Case, battery and operating instructions

### Technical Data

	Measuring range		Resolution	Error limit G *	Spindle thread pitch	Order no.
	mm	(inch)	mm / inch	µm	mm	
40 ER	0 - 25	(0-1")	0.001 /.00005"	2	0.635	4151601

\* at fixed zero point (better than DIN 863-1)

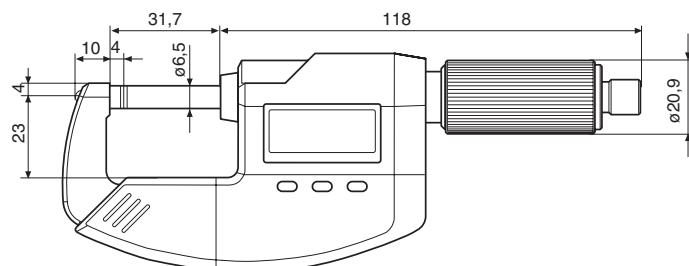

### Accessories

#### Order no.

Battery 3V, type CR 2032

4102520

## Digital Micrometer Micromar 40 EWS with sliding spindle



**REFERENCE**

### Features


#### Functions:

RESET (Zero setting the display for Relative measurement)  
ABS (Switch between Relative and Absolute measurement)  
mm/inch  
Reference-Lock/Unlock  
PRESET (Reference setting)

- Immediate measurement due to the Reference system
- MarConnect data output, choose alternatively USB OPTO RS232C Digimatic
- High contrast Liquid Crystal Display with 8.5 mm high digits
- Hard lacquered steel frame, heat insulated
- Spindle and anvil are carbide tipped
- Spindle is made of stainless steel, hardened throughout and ground
- Ratchet is integrated in the thimble
- Rapid drive
- Supplied with: Case, battery and operating instructions

### Technical Data

	Measuring range		Resolution mm / inch	Error limit G µm	Spindle thread pitch mm	Order no.
	mm	(inch)				
40 EWS	0 - 25	(0-1")	0.001 / .00005"	4	0.635	4151724

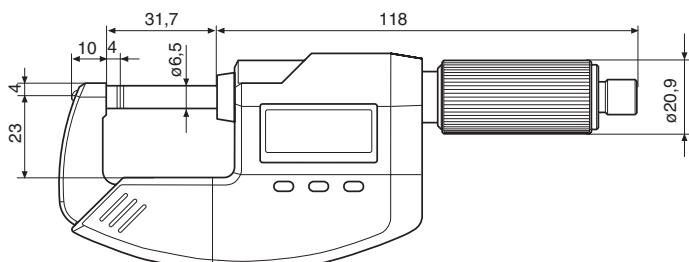

### Accessories

		Order no.
Battery 3V, type CR 2032		4102520
Data Connection Cable USB (2 m)	16 EXu	4102357
Data Connection Cable Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr	4102410
Data Connection Cable Digimatic (2 m), Flat plug 10-pin	16 EWd	4102915

Accessories for Data Processing see Chapter 11

## Universal Digital Micrometer Micromar 40 EWV with sliding spindle



REFERENCE

### Features

#### Functions:

RESET (Zero setting the display for Relative measurement)  
 ABS (Switch between Relative and Absolute measurement)  
 mm/inch  
 Reference-Lock/Unlock  
 PRESET (Reference setting)

- Immediate measurement due to the Reference system
- MarConnect data output, choose alternatively USB OPTO RS232C Digimatic
- High contrast Liquid Crystal Display with 8.5 mm high digits
- Hard lacquered steel frame, heat insulated
- Mounting bore for interchangeable anvils
- Spindle is made of stainless steel, hardened throughout and ground


- Ratchet is integrated in the thimble
- Rapid drive
- Supplied with:  
Case, battery and operating instructions

### Technical Data

Measuring range*	Resolution	Error limit**	Spindle thread pitch	Spindle dia.	Order no. without standard accessories	Order no. with standard accessories
mm	mm / inch	G µm	mm	mm		
0 - 25	0.001 /.00005"	4	0.635	6.5	<b>4151722</b>	
0 - 25	0.001 /.00005"	4	0.635	6.5		<b>4151723</b>

\* with thread anvils the measuring range is reduced

\*\*with flat anvils over the full length of the anvils

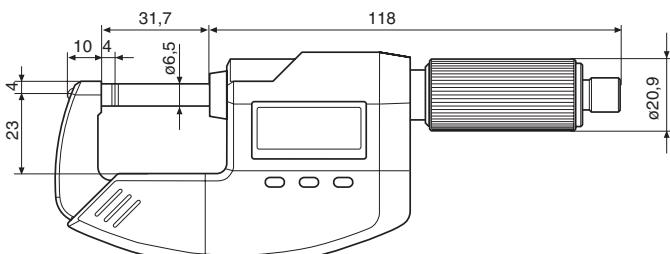

### Special Accessories

	Order no.
Battery 3V, type CR 2032	4102520
Data Connection Cable USB (2 m)	4102357
Data Connection Cable Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr 4102410
Data Connection Cable Digimatic (2 m), Flat plug 10-pin	16 Ewd 4102915

Accessories for Data Processing see Chapter 11

## Standard Accessories are included in the set

Catalog no.	Description	Order no.	Quantity required	
40 Efk	Flat anvils (reference)	4151771	1	
40 Efl	Flat anvils (sensitive)	4151761	1	
40 Eak	Anvils with reduced measuring faces (reference)	4151777	1	
40 Eal	Anvils with reduced measuring faces (sensitive)	4151767	1	
40 Etk	Disc type anvils (reference) d = 11.3 mm	4151772	1	
40 Etl	Disc type anvils (sensitive) d = 11.3 mm	4151762	1	
40 Erk	Anvils with spherical measuring faces	4151774	2	
40 Epk	Conical shaped anvil	4151773	2	
40 Esk	Wedge shaped anvil (blade)	4151775	2	



## Special Accessories

Catalog no.	Description	Order no.	Quantity required	
40 Ekk	Wedge shaped anvil (blade) 60°	4151776	2	

### Thread anvils for pitch diameters\*

- Pair consists of 1 V-anvil and 1 blade anvil

\* with thread anvils the measuring range is reduced to 20 mm



Metric thread (60°)			Whitworth thread (55°)			American UST thread (60°)			
Pitch mm	V-anvil Order no.	Blade Order no.	Pitch range TPI	V-anvil Order no.	Blade Order no.	Pitch range TPI	V-anvil Order no.	Blade Order no.	
0.5	-	0.7	4501000	4173700	40	-	32	4501007	4173743
0.7	-	1	4501001	4173701	32	-	24	4501008	4173744
1.25	-	2	4501002	4173702	24	-	18	4501009	4173745
2	-	3.5	4501003	4173703	18	-	14	4501010	4173746
					14	-	10	4501011	4173747
					10	-	7	4501012	4173748

## Micrometer Micromar 40 A

DIN  
863-1




### Features

- Hard lacquered steel frame
- Spindle and anvil made of hardened steel, carbide tipped
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Locking device
- Supplied with:  
Case, setting standard (from measuring range 25-50 mm / 1-2"), operating instructions

### Technical Data

Measuring range Metric	Readings	Error limit G	Spindle thread pitch	Order no.
0 - 25 mm	0.01 mm	4 µm	0.5 mm	4134000
25 - 50 mm	0.01 mm	4 µm	0.5 mm	4134001
50 - 75 mm	0.01 mm	5 µm	0.5 mm	4134002
75 - 100 mm	0.01 mm	5 µm	0.5 mm	4134003
100 - 125 mm	0.01 mm	6 µm	0.5 mm	4134004
125 - 150 mm	0.01 mm	6 µm	0.5 mm	4134005
150 - 175 mm	0.01 mm	7 µm	0.5 mm	4134006
175 - 200 mm	0.01 mm	7 µm	0.5 mm	4134007
Inch				
0 - 1"	.0001"	.00016"	.025"	4134900
1 - 2"	.0001"	.00016"	.025"	4134901
2 - 3"	.0001"	.00020"	.025"	4134902
3 - 4"	.0001"	.00020"	.025"	4134903
4 - 5"	.0001"	.00024"	.025"	4134904
5 - 6"	.0001"	.00024"	.025"	4134905
6 - 7"	.0001"	.00028"	.025"	4134906
7 - 8"	.0001"	.00028"	.025"	4134907

## Technical Data

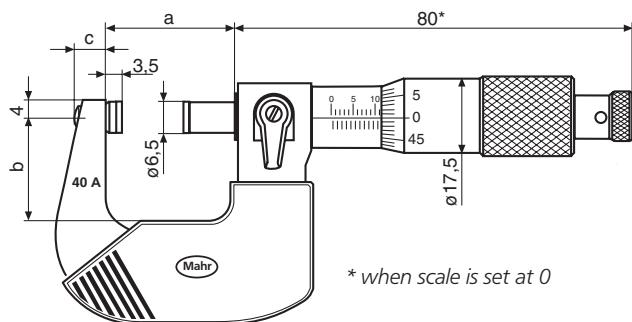

## Dimensions

Measuring range		a	b	c
mm	inch	mm	mm	mm
0 - 25	0 - 1"	31	25.5	7
25 - 50	1 - 2"	56	34.5	12
50 - 75	2 - 3"	81	47.5	12
75 - 100	3 - 4"	106	58.5	13
100 - 125	4 - 5"	131	71.5	13
125 - 150	5 - 6"	156	83.5	13
150 - 175	6 - 7"	182	95.5	13
175 - 200	7 - 8"	207	108.5	13

## Accessories

Stand, setting standards, etc. please refer to page 3-24

## Micrometer Sets Micromar 40 SA



### Application range

0 - 100 mm (4 Micrometers)  
100 - 200 mm (4 Micrometers)

### Order no.

**4134050** Incl. wooden case, setting standards 25 mm and 75 mm  
**4134051** Incl. wooden case, setting standards 125 mm and 175 mm

**0 - 4"** (4 Micrometers)  
**4 - 8"** (4 Micrometers)

**4134960** Incl. wooden case, setting standards 1" and 3"  
**4134961** Incl. wooden case, setting standards 5" and 7"

## Micrometer Micromar 40 AG

DIN  
863-1



### Features

- Hard lacquered steel frame
- Spindle and anvil made of hardened steel, carbide tipped
- Scales with satin-chrome finish
- Heat insulators
- Ratchet is integrated in the thimble
- Locking device
- Supplied with:  
Case, setting standard

### Note:


All Micrometers with measuring ranges between 400 mm to 500 mm, the frame is made from a steel tube

### Technical Data


Measuring range mm		Readings mm	Error limit <i>G</i> μm	Spindle thread pitch mm	Weight kg	Order no.
200	- 225	0.01	8	0.5	2	4134500
225	- 250	0.01	8	0.5	2.2	4134501
250	- 275	0.01	9	0.5	2.3	4134502
275	- 300	0.01	9	0.5	2.7	4134503
300	- 325	0.01	10	0.5	3.2	4134504
325	- 350	0.01	10	0.5	3.4	4134505
350	- 375	0.01	11	0.5	3.6	4134506
375	- 400	0.01	11	0.5	4	4134507
400	- 425	0.01	12	0.5	4.2	4134508
425	- 450	0.01	12	0.5	4.5	4134509
450	- 475	0.01	13	0.5	4.9	4134510
475	- 500	0.01	13	0.5	5	4134511

### Dimensions

Dimensions in mm		a	b	c	d	e
200	- 225	242.5	121.5	25	5	12
225	- 250	267.5	134	25	5	12
250	- 275	292.5	146.5	25	5	12
275	- 300	317.5	159	25	5	12
300	- 325	342.5	171.5	25	5	12
325	- 350	367.5	184	25	5	12
350	- 375	392.5	196.5	25	5	12
375	- 400	417.5	209	25	5	12
400	- 425	442	223	25	5	12
425	- 450	467	236	25	5	12
450	- 475	492	248	25	5	12
475	- 500	517	259	25	5	12

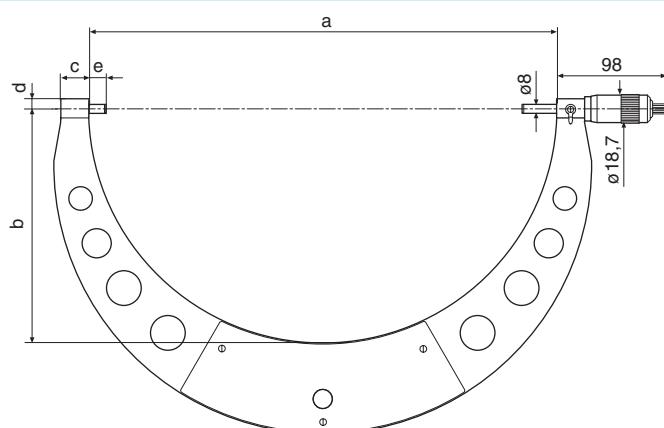

## Micrometer Micromar 40 W

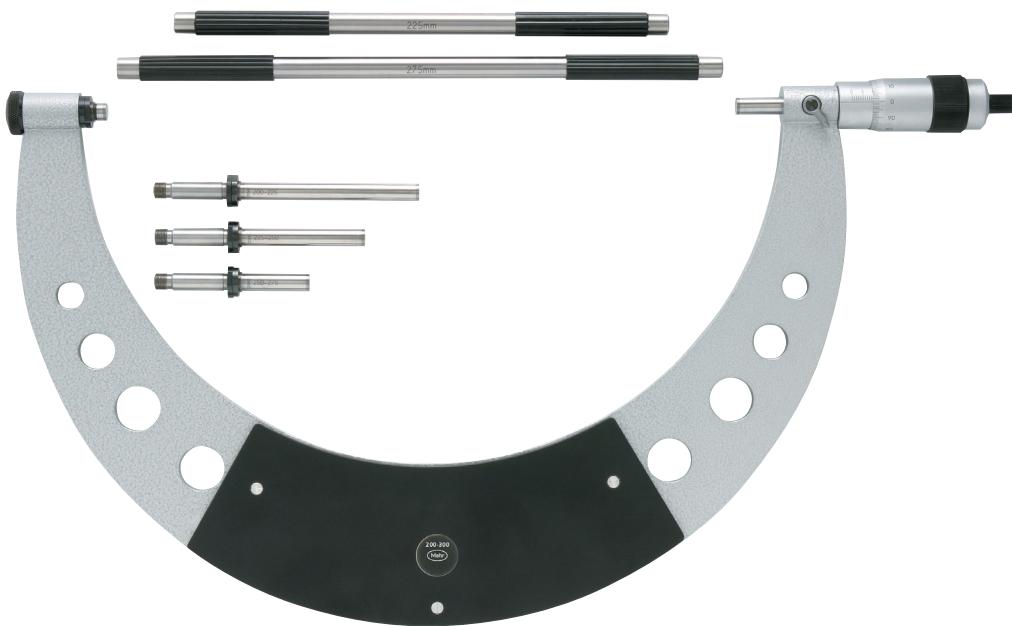

### Features

- Hard lacquered steel frame
- Spindle and anvil made of hardened steel, carbide tipped
- Scales with satin-chrome finish
- Heat insulators
- Ratchet is integrated in the thimble
- Exchangeable anvils
- Locking device
- Supplied with:  
Case, setting standards

### Note:


All Micrometers with measuring ranges from 400 mm up to 1000 mm, the frame is made from a steel tube

### Technical Data

Measuring range		Readings	Error limit <i>G</i>	Spindle thread pitch	Weight	Order no.
mm	mm	mm	µm	mm	kg	
0	-	100	0.01	5	1.1	4137500
100	-	200	0.01	7	2.1	4137501
200	-	300	0.01	9	3.4	4137502
300	-	400	0.01	11	5.7	4137503
400	-	500	0.01	13	2.6	4137504
500	-	600	0.01	21	3.3	4137505
600	-	700	0.01	23	4.0	4137506
700	-	800	0.01	26	4.4	4137507
800	-	900	0.01	28	5.3	4137508
900	-	1000	0.01	30	6.5	4137509

### Dimensions

Dimensions in mm	a	b
0 - 100	117.5	59
100 - 200	217.5	109
200 - 300	317.5	159
300 - 400	417.5	209
400 - 500	517.5	259
500 - 600	617.5	309
600 - 700	717.5	360
700 - 800	817.5	410
800 - 900	917.5	460
900 - 1000	1017.5	510

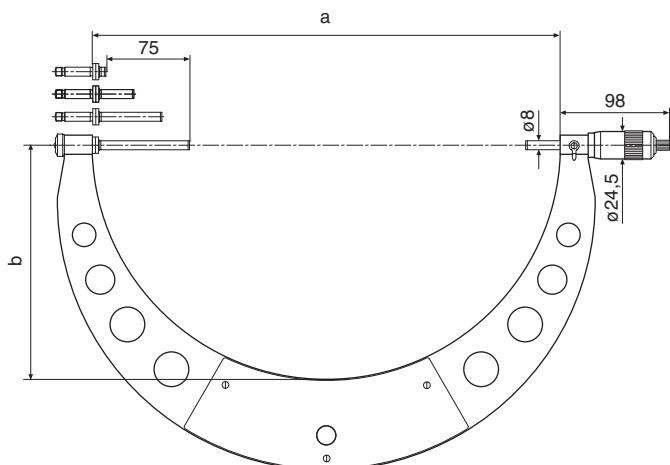

## Micrometer with integrated Dial Comparator Micromar 40 F / FC

DIN  
863-3



### Applications

- For rapid measurements of diameters of cylindrical parts (shafts, bolts and shanks)
- Measurements of thickness and length
- Recommended for standard precision parts


### Features

- Chrome plated steel frame with heat insulators
- Maximum stability
- Retraction of the movable anvil and carbide-tipped measuring faces ensures maximum wear resistance
- Longer service life due to the ceramic measuring faces (40 FC)
- Measuring spindle made of stainless steel, hardened throughout and ground, lockable
- Scales with satin-chrome finish
- Constant measuring force
- Dial Comparator is integrated in frame
- Adjustable tolerance markers
- Supplied with:  
Case

### Technical Data

	Measuring range	Retraction	Measuring faces	Measuring force	Order no.	Remarks
			Flatness	Parallelism		
<b>40 F</b>	0 - 25 mm	1 mm	$\leq 0.2 \mu\text{m}$	$\leq 1 \mu\text{m}$	9 N	<b>4150000</b>
	25 - 50 mm	1 mm	$\leq 0.2 \mu\text{m}$	$\leq 1 \mu\text{m}$	9 N	<b>4150001</b>
	<b>0 - 1"</b>	<b>.04"</b>	$\leq .00001"$	$\leq .00005"$	9 N	<b>4150900</b>
	<b>1 - 2"</b>	<b>.04"</b>	$\leq .00001"$	$\leq .00005"$	9 N	<b>4150901</b>
<b>40 FC</b>	0 - 25 mm	1 mm	$\leq 0.2 \mu\text{m}$	$\leq 1 \mu\text{m}$	9 N	<b>4150200</b>
	25 - 50 mm	1 mm	$\leq 0.2 \mu\text{m}$	$\leq 1 \mu\text{m}$	9 N	<b>4150201</b>

Micrometer			Dial Comparator		
Readings	Error limit $G_{me}$	Spindle thread pitch	Error limit $G_e$ (DIN 879)	Meas. range	Readings
0,01 mm <b>.0001"</b>	$\leq 2 \mu\text{m}$ $\leq .00008"$	0,5 mm <b>.025"</b>	1 $\mu\text{m}$ <b>.00005"</b>	$\pm 65 \mu\text{m}$ <b><math>\pm 0025"</math></b>	1 $\mu\text{m}$ <b>.00005"</b>

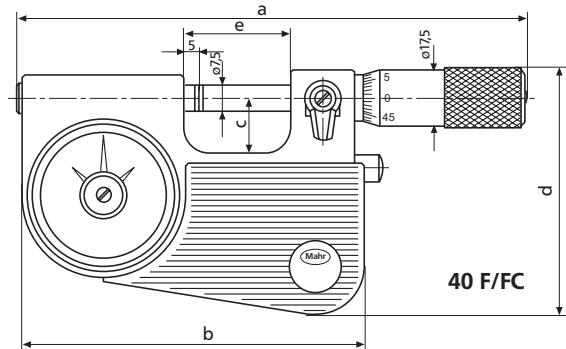

### Dimensions

	Dimensions in mm	a*	b	c	d	e
<b>40 F/FC</b>	0-25 mm ( <b>0-1"</b> )	149	100	16	71	32
	25-50 mm ( <b>1-2"</b> )	174	125	30	85	56

\* in zero position

### Accessories

Stand, setting standards, etc. please refer to page 3-24

## Micrometer with Dial Comparator Micromar 40 T

DIN  
863-3



### Applications

- For rapid measurements of diameters of cylindrical parts (shafts, bolts and shanks)
- Measurements of thickness and length
- Recommended for standard precision parts

### Features

- Rugged steel frame, heat insulated and chrome plated (up to measuring range 100 - 150 mm)
- Maximum stability
- Retraction of the movable anvil and carbide-tipped measuring faces ensures maximum wear resistance
- Measuring spindle made of stainless steel, hardened throughout and ground, lockable
- Scales with satin-chrome finish
- Constant measuring force
- Heat insulators
- Supplied with: Dial Comparator 1003, wooden case

### Technical Data

Measuring range		Retraction	Measuring faces	Measuring force	Order no.*		
			Flatness	Parallelism			
0	-	25 mm	1.2 mm	$\leq 0.2 \mu\text{m}$	$\leq 2 \mu\text{m}$	6.5 N	4154000
25	-	50 mm	1.2 mm	$\leq 0.2 \mu\text{m}$	$\leq 2 \mu\text{m}$	6.5 N	4154001
50	-	100 mm	1.2 mm	$\leq 0.2 \mu\text{m}$	$\leq 2 \mu\text{m}$	6.5 N	4154002
100	-	150 mm	1.2 mm	$\leq 0.2 \mu\text{m}$	$\leq 2 \mu\text{m}$	7.5 N	4154003
150	-	200 mm	1.2 mm	$\leq 0.2 \mu\text{m}$	$\leq 2 \mu\text{m}$	7.5 N	4154004

Micrometer			Dial Comparator*		
Readings	Error limit $G_{me}$	Spindle thread pitch	Error limit $G_e$ (DIN 879)	Meas. range	Readings
0.01 mm	$\leq 2 \mu\text{m}$	0.5 mm	1 $\mu\text{m}$	$\pm 50 \mu\text{m}$	1 $\mu\text{m}$


### Dimensions

Dimensions in mm	a**	b	c	d**	e
0 - 25	27	28	4	11	8
25 - 50	52	40	4	11	8
50 - 100	76	65	5.5	30	8
100 - 150	127	87	5.5	30	8
150 - 200	177	112	5.5	30	8

\* Alternative indicating instruments are available on request  
\*\* in zero position

### Accessories

Stand, setting standards, etc. please refer to page 3-24

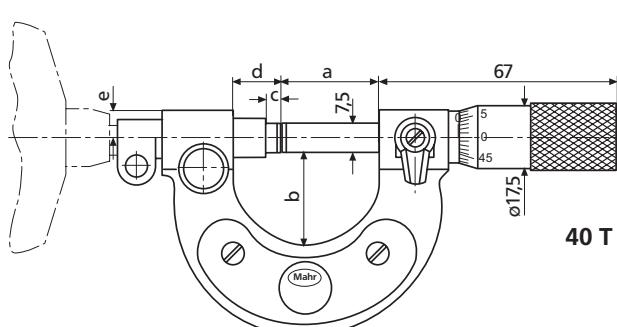

Indicating Snap Gage 840 F  
see page 9-8



## Precision Bench Micrometer Micromar 40 TS

DIN  
863-3



### Applications

- For rapid measurements of diameters of cylindrical parts (shafts, bolts and shanks)
- Measurements of thickness and length
- Recommended for standard precision parts


### Features

- Rugged steel frame, can be tilted up to 45° in relation to the sturdy base
- Retraction of the movable anvil and carbide-tipped measuring faces ensures maximum wear resistance
- Height-adjustable stop
- Constant measuring force
- Measuring spindle made of stainless steel, hardened throughout and ground, lockable
- Scales with satin-chrome finish
- Supplied with:  
Dial Comparator 1003

### Technical Data

Measuring range	Retraction	Measuring faces	Measuring force	Order no.*	Order no. wooden case
Flatness	Parallelism				
0 - 50 mm	1.2 mm	≤ 0.2 µm	≤ 2 µm	6.5 N	4154030
0 - 2"	.045"	≤ .00001"	≤ .00008"	6.5 N	4154930

\* Alternative indicating instruments are available on request

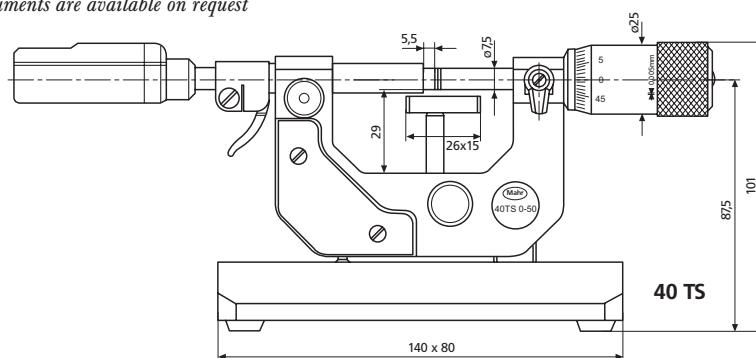

Indicating Thread Snap Gage  
852 TS see page 9-19

Micrometer			Dial Comparator 1003/1003Z		
Readings	Error limit $G_{me}$	Spindle thread pitch	Error limit $G_e$ (DIN 879)	Meas. range	Readings
0.01 mm .0001"	≤ 2 µm ≤ .00008"	0.5 mm .025"	1 µm .00005"	± 50 µm ± .002"	1 µm .00005"

### Accessories

Stand, setting standards, etc. please refer to page 3-24



## Micrometer Micromar 40 AB with reduced measuring faces




DIN  
863-3

### Features

- For measuring recesses, grooves, etc.
- Hard lacquered steel frame
- Spindle and anvil made of hardened steel, carbide tipped
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Locking device
- Supplied with: Case, setting standard (from measuring range 25 - 50 mm / 1 - 2"), operating instruction

### Technical Data

Measuring range	Readings	Error limit G	Spindle thread pitch	Order no.
0 - 25 mm	0.01 mm	4 µm	0.5 mm	4134100
25 - 50 mm	0.01 mm	4 µm	0.5 mm	4134101
50 - 75 mm	0.01 mm	5 µm	0.5 mm	4134102
75 - 100 mm	0.01 mm	5 µm	0.5 mm	4134103
<b>0 - 1"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134920</b>
<b>1 - 2"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134921</b>
<b>2 - 3"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134922</b>
<b>3 - 4"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134923</b>

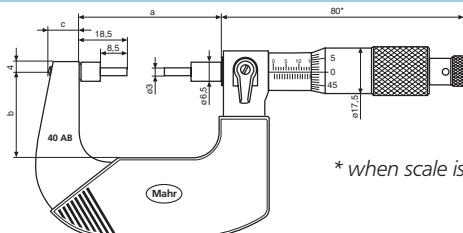

\* when scale is set at 0

Dimensions in mm	a	b	c
0 - 25 mm / 0-1"	56	34.5	12
25 - 50 mm / 1-2"	81	47.5	12
50 - 75 mm / 2-3"	106	58.5	13
75 - 100 mm / 3-4"	131	71.5	13

## Micrometer Micromar 40 AS with sliding spindle and measuring spades




DIN  
863-3

### Features

- For measuring narrow recesses, grooves, etc.
- Hard lacquered steel frame
- Spindle and anvil made of hardened steel
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Supplied with: Case, setting standard (from measuring range 25 - 50 mm / 1 - 2"), operating instructions

### Technical Data

Measuring range	Readings	Error limit G	Spindle thread pitch	Order no.
0 - 25 mm	0.01 mm	4 µm	0.5 mm	4134200
25 - 50 mm	0.01 mm	4 µm	0.5 mm	4134201
50 - 75 mm	0.01 mm	5 µm	0.5 mm	4134202
75 - 100 mm	0.01 mm	5 µm	0.5 mm	4134203
<b>0 - 1"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134930</b>
<b>1 - 2"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134931</b>
<b>2 - 3"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134932</b>
<b>3 - 4"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134933</b>

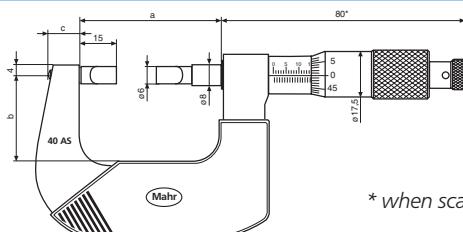

\* when scale is set at 0

Dimensions in mm	a	b	c
0 - 25 mm / 0-1"	56	34.5	12
25 - 50 mm / 1-2"	81	47.5	12
50 - 75 mm / 2-3"	106	58.5	13
75 - 100 mm / 3-4"	131	71.5	13

## Micrometer Micromar 40 AR with spherical anvil



DIN  
863-3


### Features

- For measuring the wall thickness of a pipe, etc.
- Hard lacquered steel frame
- Spindle and anvil made of hardened steel, carbide tipped
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Locking device
- Supplied with:  
Case, setting standard (measuring range for 25 - 50 mm / 1 - 2"), operating instructions

### Technical Data

Measuring range	Readings	Error limit G	Spindle thread pitch	Order no.
0 - 25 mm	0.01 mm	4 µm	0.5 mm	<b>4134250</b>
25 - 50 mm	0.01 mm	4 µm	0.5 mm	<b>4134251</b>
<b>0 - 1"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134940</b>
<b>1 - 2"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134941</b>

Dimensions in mm	a	b	c
0 - 25 mm / <b>0-1"</b>	31	25.5	7
25 - 50 mm / <b>1-2"</b>	56	34.5	12

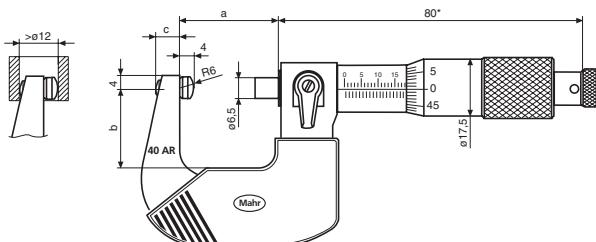

\* when scale is set at 0

## Micrometer Micromar 40 AW with sliding spindle and disc-type anvils




### Features

- For measuring soft materials such as felt, rubber, cardboard, etc.
- Hard lacquered steel frame
- Spindle and anvil made of hardened steel
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Supplied with:  
Case, operating instructions

### Technical Data



Measuring range	Readings	Error limit G	Parallelism	Flatness	Spindle thread pitch	Order no.
0 - 25 mm	0.01 mm	8 µm	5 µm	2 µm	0.5 mm	<b>4134300</b>
<b>0 - 1"</b>	<b>.0001"</b>	<b>.0003"</b>	<b>.0002"</b>	<b>.001"</b>	<b>.025"</b>	<b>4134950</b>

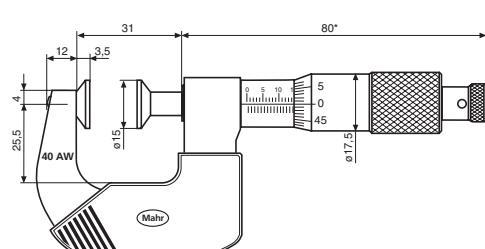

\* when scale is set at 0

## Precision Micrometer Micromar 40 SM with disc-type anvils

DIN  
863-3

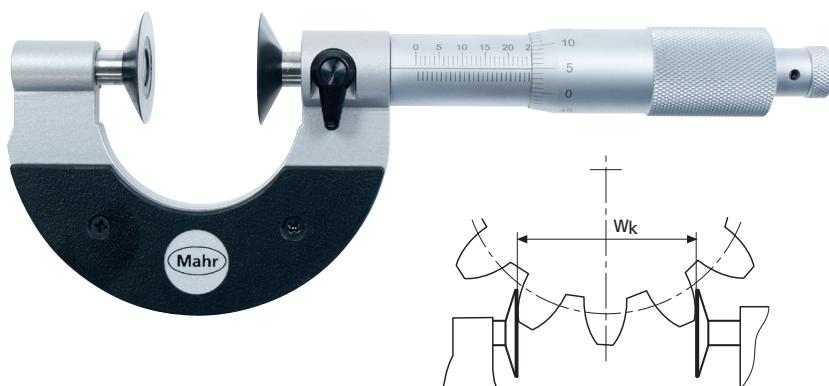

### Applications

- For measurements of
- Tooth spans  $W_k$  as of module 0.8 as indirect determination of tooth thickness on spur gears with straight and helical teeth
  - Shoulders on shafts
  - Undercut dimensions
  - Registers
  - Soft materials such as rubber, cardboard, felt, etc.

### Features


- Hard lacquered steel frame
- Maximum stability
- Spindle is hardened throughout and ground
- Disc-type anvils are hardened and lapped
- Scale have a satin chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Locking device
- Supplied with:  
Case

### Technical Data

Measuring range mm	Readings mm	Error limit $G$ $\mu\text{m}$	Spindle thread pitch mm	Measuring faces		Order no.
				Flatness $\mu\text{m}$	Parallelism $\mu\text{m}$	
0 - 25	0.01	4	0.5	$\leq 0.6$	$\leq 4$	4134600
25 - 50	0.01	4	0.5	$\leq 0.6$	$\leq 4$	4134601
50 - 75	0.01	5	0.5	$\leq 0.6$	$\leq 4$	4134602
75 - 100	0.01	5	0.5	$\leq 0.6$	$\leq 4$	4134603
100 - 125	0.01	6	0.5	$\leq 0.6$	$\leq 5$	4134604
125 - 150	0.01	6	0.5	$\leq 0.6$	$\leq 5$	4134605
150 - 175	0.01	7	0.5	$\leq 0.6$	$\leq 5$	4134606
175 - 200	0.01	7	0.5	$\leq 0.6$	$\leq 5$	4134607

### Dimensions

Dimensions in mm	a	b	c	d	e	f
0 - 25	45	30.5	18.1	6	11	25
25 - 50	70	35	18.1	6	11	25
50 - 75	95	48	18.1	6	11	25
75 - 100	120	59.5	18.1	6	11	25
100 - 125	145	71	18.1	6	11	30
125 - 150	170	83	18.1	6	11	30
150 - 175	195	96	18.1	6	11	30
175 - 200	220	108	18.1	6	11	30

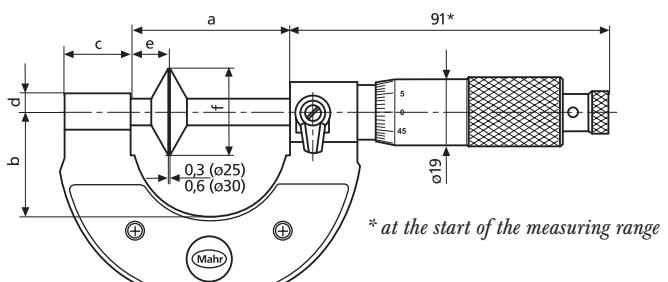

\* at the start of the measuring range

Indicating Snap Gage 840 FM  
see page 9-14



### Accessories

Stand, setting standards, etc. please refer to page 3-24

## Thread Micrometer Micromar 40 Z

DIN  
863-3




### Features

- For measuring pitch, root and outside diameters
- Hard lacquered steel frame, heat insulated
- Spindle is hardened throughout, ground and is also provided with a locking device
- Adjustable anvil
- Spindle and anvil both have a mounting bore to accommodate interchangeable anvils
- Flat end surface of the anvil shank rests on a hardened steel ball which is at the bottom of the mounting bore
- Scales have a satin-chrome finish
- Supplied with: Case

### Technical Data

Measuring range mm	Readings mm	Error limit $G_{me}$ μm	Spindle thread pitch mm	Mounting bores for anvils mm	Order no.
0 - 25*	0.01	4	0.5	3.5	4170030
25 - 50	0.01	4	0.5	3.5	4170031
50 - 75	0.01	5	0.5	3.5	4170032
75 - 100	0.01	5	0.5	3.5	4170033
100 - 125	0.01	6	0.5	3.5	4170034
125 - 150	0.01	6	0.5	3.5	4170035
150 - 175	0.01	7	0.5	3.5	4170036
175 - 200	0.01	7	0.5	3.5	4170037

\* Setting only with Thread Setting Plug Gages 715 E, when the interchangeable anvils span over several leads.

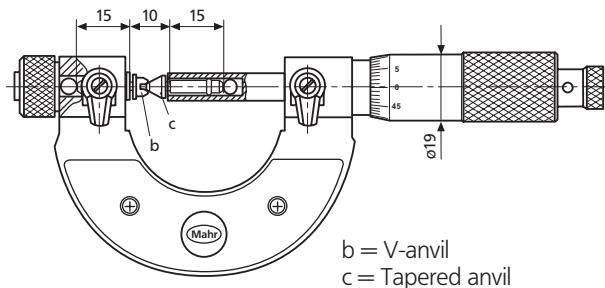

Indicating Thread Snap Gage 852 see page 9-20




### Accessories

#### Setting Standards 43 Z

For setting Thread Micrometers 40 Z.

With point on one side and a V-groove on the other, both match the pitch angle of thread to be inspected.


One setting standard is sufficient for two adjacent frame sizes.



Length mm	Accuracy ± μm	Thread angle 60° Order no.	Thread angle 55° Order no.
25	4	4175000	4175100
50	4.5	4175001	4175101
75	4.5	4175002	4175102
100	4.5	4175003	4175103
125	5	4175004	4175104
150	5	4175005	4175105
175	5	4175006	4175106
200	5.5	4175630	4175636

## Interchangeable Anvils for Thread Micrometer Micromar 40 Z

For pitch and outside diameters. Hardened, wear-resistant special steel. With cylindrical mounting shank and retainer ring which ensures locking while permitting rotation in bore of spindle and anvil.



### For pitch diameters

Pair consists of V-anvil and tapered anvil. For pitch range 0.2 - 0.45 mm V-anvil covers 3 thread leads, set with a Thread Setting Plug Gage 715 E, as opposed to Setting Standards 43 Z for other applications.

Metric thread (60°)			Whitworth thread (55°)				American UST thread (60°)			
Pitch mm	V-anvil Order no.	Tapered anvil Order no.	Pitch range TPI	V-anvil Order no.	Tapered anvil Order no.	Pitch range TPI	V-anvil Order no.	Tapered anvil Order no.		
0.2	<b>4173007</b>	<b>4173407</b>	40 - 32	<b>4173043</b>	<b>4173443</b>	60 - 48	<b>4173113</b>	<b>4173513</b>		
0.25	<b>4173008</b>	<b>4173408</b>	32 - 24	<b>4173044</b>	<b>4173444</b>	48 - 40	<b>4173114</b>	<b>4173514</b>		
0.3	<b>4173009</b>	<b>4173409</b>	24 - 18	<b>4173045</b>	<b>4173445</b>	40 - 32	<b>4173115</b>	<b>4173515</b>		
0.35	<b>4173010</b>	<b>4173410</b>	18 - 14	<b>4173046</b>	<b>4173446</b>	32 - 24	<b>4173116</b>	<b>4173516</b>		
0.4	<b>4173011</b>	<b>4173411</b>	14 - 10	<b>4173047</b>	<b>4173447</b>	24 - 18	<b>4173117</b>	<b>4173517</b>		
0.45	<b>4173012</b>	<b>4173412</b>	10 - 7	<b>4173048</b>	<b>4173448</b>	18 - 14	<b>4173118</b>	<b>4173518</b>		
0.5 - 0.7	<b>4173000</b>	<b>4173400</b>	7 - 4.5	<b>4173049</b>	<b>4173449</b>	14 - 10	<b>4173119</b>	<b>4173519</b>		
0.7 - 1	<b>4173001</b>	<b>4173401</b>	4.5 - 3	<b>4173050</b>	<b>4173450</b>	10 - 7	<b>4173120</b>	<b>4173520</b>		
1.25 - 2	<b>4173002</b>	<b>4173402</b>	3 - 2.5	<b>4179408</b>	<b>4179409</b>	7 - 4.5	<b>4173121</b>	<b>4173521</b>		
2 - 3.5	<b>4173003</b>	<b>4173403</b>				4.5 - 3	<b>4173122</b>	<b>4173522</b>		
3.5 - 5	<b>4173004</b>	<b>4173404</b>								
5 - 7	<b>4173005</b>	<b>4173405</b>								
7 - 9	<b>4173006</b>	<b>4173406</b>								

### For pitch diameters

Pair consists of V-anvil and tapered anvil.  
Shank length 15.5 mm


### Trapezoid threads according to DIN 103

Pitch mm	V-anvil Order no.	Tapered anvil Order no.
1	<b>4173250</b>	<b>4173650</b>
1.5	<b>4173251</b>	<b>4173651</b>
2	<b>4173252</b>	<b>4173652</b>
3	<b>4173253</b>	<b>4173653</b>
4	<b>4173254</b>	<b>4173654</b>
5	<b>4173255</b>	<b>4173655</b>
6	<b>4173256</b>	<b>4173656</b>
7	<b>4173257</b>	<b>4173657</b>
8	<b>4173258</b>	<b>4173658</b>
9	<b>4173259</b>	<b>4173659</b>
10	<b>4173260</b>	<b>4173660</b>
12	<b>4173261</b>	<b>4173661</b>
14	<b>4173262</b>	<b>4173662</b>
16	<b>4173263</b>	<b>4173663</b>
18	<b>4173264</b>	<b>4173664</b>
20	<b>4173265</b>	<b>4173665</b>

### For outside diameter

**Anvils 40 Za**  
with flat measuring faces

Made of hardened steel  
**Order no.** **4173210**  
Carbide tipped  
**Order no.** **4511190**




## Accessories for Micromar Micrometers



### Ball shaped Anvil Attachment 40 k

- For measuring the thickness, for example: of pipe walls
- Slips over every anvil or the spindle with a dia. 7.5 mm
- Carbide ball,  
Ball dia.  $5 \pm 0.002$  mm


Order no. 4130099



### Thread Pin Gage 426 M in holder

- For determining the pitch diameter of external threads according to the three wire method

- Slips over every anvil or the spindle
- Pin gages are hardened and lapped



**Pin gage dia.**   **Manufacturing tol.**   **Mounting hole**

0.17 - 5.05 mm    $\pm 0.5 \mu\text{m}$    dia. 6.5 mm / 7.5 mm

**Order no.** and further details see page 13-17

### Stand 41 H

- For mounting a micrometer
- Enables the user to use both hands to operate the micrometer and / or to insert a work piece
- Sturdy, heavy-duty base, hammer-dimple enamel finish
- Jaw width 3.5 - 15 mm
- Clamping jaws are rubber lined to protect micrometer, the clamping jaws can be tilted
- Both the clamping jaws and hinge are fixed in place with one screw

**Dimensions**  
(D x W x H)

130 x 100 x 90 mm

**Order no.**

4158000

### Setting Standards 43 A

- For testing the basic setting of a micrometer
- Heat insulated handle
- Manufacturing tolerance js 2



Length mm	Order no.	Length inch	Order no.
25	4159400	1"	4159940
50	4159401	2"	4159941
75	4159402	3"	4159942
100	4159403	4"	4159943
125	4159404	5"	4159944
150	4159405	6"	4159945
175	4159406	7"	4159946

### Wooden Cases for Micrometer

For measuring ranges over 100 mm the following wooden cases are available:

	40 SH	40 SM	Order no.
<b>Meas. range</b> mm	100-125	95-120	4130064
	125-150	120-145	4130065
	150-175	145-170	4130066
	175-200	170-195	4130067

## Inside Micrometer Micromar 44 F

DIN  
863-4




### Features

- Rigid, lightweight tubular construction
- Spindle is hardened throughout and ground
- Measuring faces spherically lapped, one measuring face adjustable
- Scales with satin-chrome finish
- From measuring range 100-125 mm with heat insulators and a locking device
- Supplied with:  
Case

### Technical Data

Measuring range mm	Readings mm	Error limit G $\mu\text{m}$	Spindle thread pitch mm	Order no.
30 - 40	0.01	4	0.5	4163000
40 - 50	0.01	4	0.5	4163001
50 - 70	0.01	5	0.5	4163002
70 - 100	0.01	5	0.5	4163003
100 - 125	0.01	6	0.5	4163004
125 - 150	0.01	6	0.5	4163005
150 - 175	0.01	7	0.5	4163006
175 - 200	0.01	7	0.5	4163007

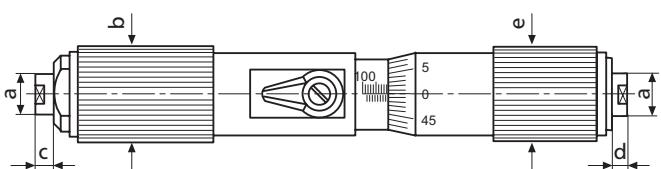

### Dimensions

Meas. range in mm	a	b	c	d	e
30 - 40	ø7	ø12.5	2	4	ø12.6
40 - 50	ø7	ø12.5	2.5	4.5	ø12.6
50 - 70	ø7	ø13.5	2.5	4.5	ø13.6
70 - 100	ø7	ø13.5	4.5	4.5	ø14.0
100 - 125	ø8	ø20	4.5	4.5	ø20
125 - 150	ø8	ø20	8	8	ø20
150 - 175	ø8	ø20	8	8	ø20
175 - 200	ø8	ø20	8	8	ø20

### Accessories

#### Page

**Ring Gage 355 E** for testing the basic setting

13-19


Special wear resistant steel,  
hardened and lapped

Dimensions according to DIN 2250 C

Manufacturing tolerance in accordance to DIN 2250  
Uncertainty of the engraved actual dimension 1/2 IT1



## Inside Micrometer Micromar 44 Cms Set

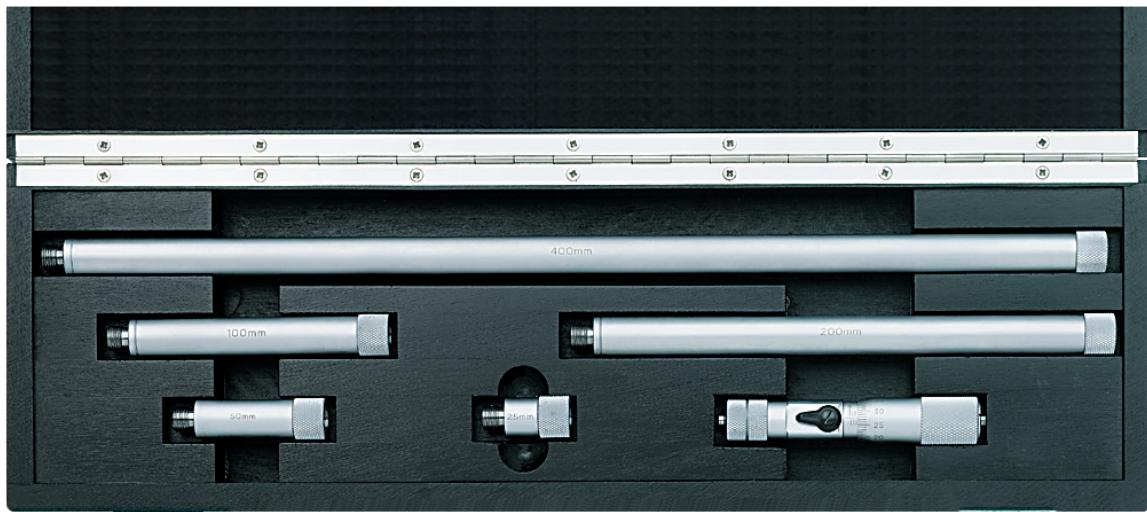


### Features

• Rigid, lightweight tubular construction	• Scales with satin-chrome finish	• Interchangeable extensions 44 Cv with cylindrical gage rods that are spring-mounted in protective sleeves; for the extension of the measuring range	<b>Span of error</b> Basic unit 5 µm  Basic unit in combination with any of the extensions $4 \mu\text{m} + 10 \times 10^{-6} \times l$ ( $l$ = length of the combination in mm)
• Spindle is hardened throughout and ground	• Carbide tipped spherical measuring faces	• Protection sleeves have a satin chrome finish	• Supplied with: Case
• Locking lever			

### Technical Data

Catalog no.	Measuring range			Measuring head 44 Cm	Extensions 44 Cv	Order no.
	mm		mm	Readings	length in mm	
44 Cms1	100	-	150		25	4168020
44 Cms2	100	-	300		25 / 50 / 100	4168021
44 Cms3	100	-	500	0.01	25 / 50 / 100 / 200	4168022
44 Cms4	100	-	900*		25 / 50 / 100 / 200 / 400	4168023

\* up to 2500 mm can be achieved with 2 extensions: 44 Cv 800 mm

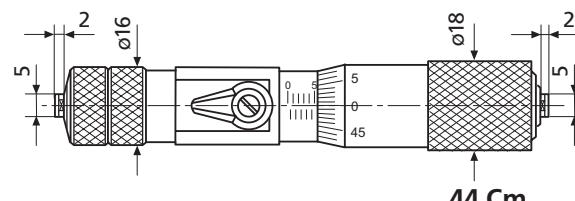

### Accessories

Inside Micrometers, ring gages, etc. please refer to page 3-30

## Inside Micrometer Micromar 44 CB with reduced measuring faces

DIN  
863-4




### Features

- Basic Instrument consists of: Measuring head 44 CBm and End piece CBv
- Spindle is hardened throughout and ground
- Locking lever
- Carbide tipped spherical measuring faces
- Interchangeable extensions 44 Cv with cylindrical gage rods that are spring-mounted in protective sleeves; for the extension of the measuring range (Accessories)
- Protection sleeves have a satin chrome finish
- Basic unit 6 µm
- Basic unit in combination with any of the extensions  $4 \mu\text{m} + 10 \times 10^{-6} \times l$  ( $l$  = length of the combination in mm)
- Supplied with: Case

### Technical Data

Measuring range (Measuring head 44 CBm and End piece CBv)		Readings	Measuring head 44 CBm Spindle thread pitch	Order no.
mm	mm	mm	mm	
150	-	175		4167922
175	-	200		4167906
250	-	275	0.01	4167912
275	-	300	0.5	4167921

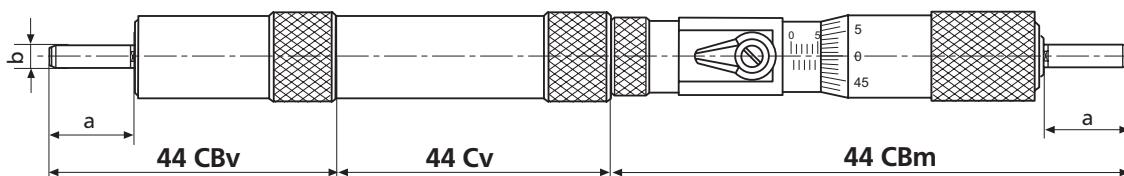

### Accessories

#### Individual Extensions 44 Cv

Length mm	Order no.	Length mm	Order no.	Dimensions
25	4167030	200	4167033	Meas. range in mm
50	4167031	400	4167034	a
100	4167032	800	4167035	b
Case, wooden boxes, etc. please refer to page 3-30				150 - 175 dia. 5 175 - 200 dia. 5 200 - 275 dia. 5 275 - 300 dia. 5

## Inside Thread Micrometer Micromar 44 CZ

DIN  
863-4




### Features

- Basic Instrument consists of: Measuring head and End piece
  - Measuring head and End piece with mounting bore for interchangeable anvils
  - Rigid, lightweight tubular construction
  - Spindle is hardened throughout and ground
  - Locking lever
  - Scales with satin-chrome finish
  - Carbide tipped spherical measuring faces
  - Interchangeable extensions 44 Cv with cylindrical gage rods that are spring-mounted in protective sleeves; for the extension of the measuring range (Accessories)
  - Protection sleeves have a satin chrome finish
- Span of error**  
Basic unit 6 µm  
Basic unit in combination with any of the extensions  
 $4 \mu\text{m} + 10 \times 10^{-6} \times l$   
( $l$ = length of the combination in mm)
- Supplied with:  
Case

### Technical Data

Measuring range (Measuring head 44 CZm and End piece CZe) mm	Readings mm	Measuring head 44 CZm Spindle thread pitch mm	Order no.
200 - 225	0.01	0.5	4168030

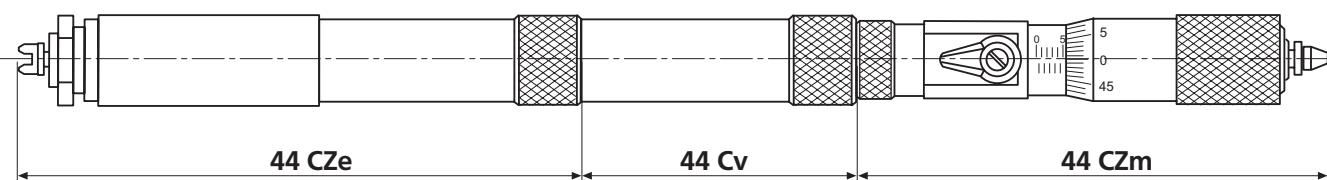

### Accessories

#### Individual Extensions 44 Cv


Length mm	Order no.	Length mm	Order no.
25	4167030	200	4167033
50	4167031	400	4167034
100	4167032	800	4167035

Case, wooden boxes, etc. please refer to page 3-30

## Inchangeable Anvils for Inside Thread Micrometer Micromar 44 CZ

For pitch diameters. Hardened, wear-resistant special steel. With cylindrical mounting shank and retainer ring which ensures locking while permitting rotation in bore of spindle and anvil.

### For pitch diameters



Metric thread (60°)			Whitworth thread (55°)			American UST thread (60°)								
Pitch mm	V-anvil Order no.	Tapered anvil Order no.	Pitch range TPI	V-anvil Order no.	Tapered anvil Order no.	Pitch range TPI	V-anvil Order no.	Tapered anvil Order no.						
0.5	-	0.7	4179400	4173400	40	-	32	4179043	4173443	40	-	32	4179115	4173515
0.7	-	1	4179401	4173401	32	-	24	4179044	4173444	32	-	24	4179116	4173516
1.25	-	2	4179402	4173402	24	-	18	4179045	4173445	24	-	18	4179117	4173517
2	-	3.5	4179403	4173403	18	-	14	4179046	4173446	18	-	14	4179118	4173518
3.5	-	5	4179404	4173404	14	-	10	4179047	4173447	14	-	10	4179119	4173519
5	-	7	4179405	4173405	10	-	7	4179048	4173448	10	-	7	4179120	4173520
7	-	9	4179406	4173406	7	-	4.5	4179049	4173449	7	-	4.5	4179121	4173521
					4.5	-	3	4179050	4173450	4.5	-	3	4179122	4173522
					3	-	2.5	4179407	4179409					

### For pitch diameters

Pair consists of V-anvil and tapered anvil.  
Shank length 15.5 mm


### Trapezoid threads according to DIN 103

Pitch mm	V-anvil Order no.	Pointed anvil Order no.
1	4179950	4173650
1.5	4179951	4173651
2	4179952	4173652
3	4179953	4173653
4	4179954	4173654
5	4179955	4173655
6	4179956	4173656
7	4179957	4173657
8	4179958	4173658
9	4179959	4173659
10	4179960	4173660
12	4179961	4173661
14	4179962	4173662
16	4179963	4173663
18	4179964	4173664
20	4179965	4173665

## Accessories for Micromar 44 Cms / 44 CB / 44 CZ


### Individual Extensions 44 Cv

Length a mm	dia. b mm	Order no.
25	15	4167030
50	15	4167031
100	15	4167032
200	15	4167033
400	15	4167034
800	22	4167035

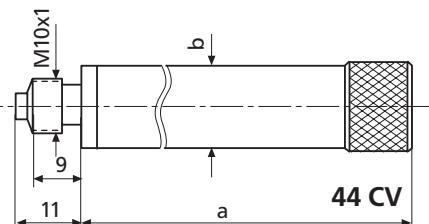

### Inside Micrometer 44 Cm

Measuring range mm	Reading mm	Spindle thread pitch mm	Order no.
100 - 125	0.01	0.5	4168001

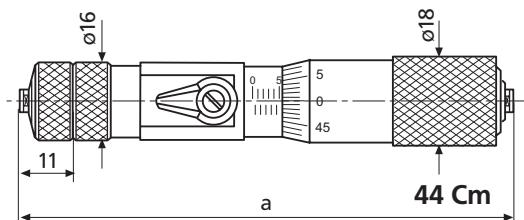

### Ring Gage 355 E

Ring Gage 355 E for testing the basic setting see page 13-19.  
Special wear resistant steel, hardened and lapped  
Dimensions according to DIN 2250 C  
Manufacturing tolerance in accordance to DIN 2250  
Uncertainty of the engraved actual dimension 1/2 IT1



	Order no.
<b>Case</b> for Inside Micrometer 44 Cm and extension sets Cvs1 or Cvs2	4168015
<b>Wooden case</b> for 2 extensions 44Cv 800 mm	4168016

## Self-Centering Inside Micrometer Micromar 44 A

DIN  
863-4



### Applications

- For measuring:
- through holes
  - blind holes
  - centering shoulders

### Technical Data

Measuring range mm	Measuring depth mm	Readings mm	Error limit G* µm	Order no.
6 - 8	58 / (133**)	0.001	4	4190310
8 - 10	58 / (133**)	0.001	4	4190311
10 - 12	58 / (133**)	0.001	4	4190312
12 - 16	64 / (139**)	0.001	4	4190313
16 - 20	64 / (139**)	0.001	4	4190314
20 - 25	68 / (218**)	0.005	4	4190315
25 - 30	68 / (218**)	0.005	4	4190316
30 - 40	76 / (226**)	0.005	4	4190317
40 - 50	76 / (226**)	0.005	4	4190319
50 - 60	79 / (229**)	0.005	5	4190320
60 - 70	79 / (229**)	0.005	5	4190321
70 - 85	97 / (247**)	0.005	5	4190012
85 - 100	97 / (247**)	0.005	5	4190013
100 - 125	132 / (282**)	0.005	6	4190014
125 - 150	132 / (282**)	0.005	6	4190015
150 - 175	132 / (282**)	0.005	7	4190016
175 - 200	132 / (282**)	0.005	7	4190017

\* Over the full length of the anvils

\*\* With the extension 44 Av

## Self-Centering Inside Micrometer Sets 44 AS

Measuring range mm	Number of Micrometers	Ring gages dia. mm	Order no.
6 - 12	3	8 / 10	4190350
12 - 20	2	16	4190351
20 - 50	4	25 / 40	4190352
50 - 100	4	60 / 85	4190353

- Supplied with:  
Case and ring gage

### Features

- Scales with satin-chrome finish
- Spindle is hardened throughout and ground
- Rapid drive with integrated ratchet
- Self-centering measuring head consists of 3 laterally positioned anvils, each are offset at intervals of 120°
- Anvils from 12 mm are carbide tipped
- From 12 mm the anvils can be used to measure to the bottom of a bore
- From 40 mm all measuring heads are made from aluminum to reduce weight
- Supplied with:  
Case and operating instructions

### Accessories

Measuring heads, ring gages, etc. please refer to page 3-34



## Digital Self-Centering Inside Micrometer Micromar 44 EWR



### REFERENCE

### Features

#### Functions:

- 0 (Setting the display to zero for Relative measurement)
- ABS (Switching between Relative and Absolute measurement)
- mm/inch
- PR (Reference setting)

- Immediate measurement due to the Reference system
- Basic Instrument consists of: Basic Unit 44 EXg and Measuring Head 44 Ak
- Threaded connection for changing the measuring heads
- Self-Centering measuring head consists of 3 laterally positioned anvils, each are offset at intervals of 120°
- Anvils from 12 mm are carbide tipped
- From 12 mm the anvils can be used to measure to the bottom of a bore
- From 40 mm all measuring heads are made from aluminum to reduce weight
- Supplied with: Case, battery and operating instructions

### Technical Data

Measuring range		Measuring depth	Readings	Error limit G* µm	Order no.
mm	(inch)	mm	mm / inch		
6	-	8 <b>(.25 - .3125")</b>	58 / (133**)	0.001 / <b>.00005"</b>	4 <b>4191120</b>
8	-	10 <b>(.3125 - .4")</b>	58 / (133**)	0.001 / <b>.00005"</b>	4 <b>4191121</b>
10	-	12 <b>(.4 - .4725")</b>	58 / (133**)	0.001 / <b>.00005"</b>	4 <b>4191122</b>
12	-	16 <b>(.4725 - .625")</b>	64 / (139**)	0.001 / <b>.00005"</b>	4 <b>4191123</b>
16	-	20 <b>(.625 - .775")</b>	64 / (139**)	0.001 / <b>.00005"</b>	4 <b>4191124</b>
20	-	25 <b>(.775 - 1")</b>	68 / (218**)	0.001 / <b>.00005"</b>	4 <b>4191125</b>
25	-	30 <b>(1 - 1.2")</b>	68 / (218**)	0.001 / <b>.00005"</b>	4 <b>4191126</b>
30	-	40 <b>(1.2 - 1.6")</b>	76 / (226**)	0.001 / <b>.00005"</b>	4 <b>4191127</b>
40	-	50 <b>(1.6 - 2")</b>	76 / (226**)	0.001 / <b>.00005"</b>	4 <b>4191129</b>
50	-	60 <b>(2 - 2.35")</b>	79 / (229**)	0.001 / <b>.00005"</b>	5 <b>4191130</b>
60	-	70 <b>(2.35 - 2.75")</b>	79 / (229**)	0.001 / <b>.00005"</b>	5 <b>4191131</b>
70	-	85 <b>(2.75 - 3.35")</b>	97 / (247**)	0.001 / <b>.00005"</b>	5 <b>4191032</b>
85	-	100 <b>(3.35 - 4")</b>	97 / (247**)	0.001 / <b>.00005"</b>	5 <b>4191033</b>
100	-	125 <b>(4 - 4.9")</b>	132 / (282**)	0.001 / <b>.00005"</b>	6 <b>4191034</b>
125	-	150 <b>(4.9 - 5.9")</b>	132 / (282**)	0.001 / <b>.00005"</b>	6 <b>4191035</b>
150	-	175 <b>(5.9 - 6.9")</b>	132 / (282**)	0.001 / <b>.00005"</b>	7 <b>4191036</b>
175	-	200 <b>(6.9 - 7.9")</b>	132 / (282**)	0.001 / <b>.00005"</b>	7 <b>4191037</b>

\* Over the full length of the anvils

\*\* With the extension 44 Av

## Digital Self-Centering Inside Micrometer Sets Micromar 44 EWR

Measuring range		Number of measuring heads 44 Ak	Ring gages	Order no.
mm	(inch)		dia. mm	
6	-	12 <b>(.25 - .4725")</b>	3	8 / 10 <b>4191160</b>
12	-	20 <b>(.4725 - .775")</b>	2	16 <b>4191161</b>
20	-	50 <b>(.775" - 2")</b>	4	25 / 40 <b>4191162</b>
50	-	100 <b>(2 - 4")</b>	4	60 / 85 <b>4191163</b>

- Supplied with:  
1 Basic Unit 44 EWg, Measuring Heads 44 Ak, case and ring gages



### Accessories

Measuring heads, ring gages, etc. please refer to page 3-34

## Self-Centering Measuring Pistol Micromar 844 A



### Features

- Basic Instrument consists of: 844 Ag and Measuring Head 44 Ak
- Threaded connection for changing the measuring heads
- Self-Centering measuring head consists of 3 laterally positioned anvils, each are offset at intervals of 120°
- Anvils from 12 mm are carbide tipped
- From 12 mm the anvils can be used to measure to the bottom of a bore
- From 40 mm all measuring heads are made from aluminum to reduce weight
- Supplied with:  
Case and operating instructions

The following indicating instruments are recommended:

#### Indicating instr. Order no.

MarCator 1086 Ri	<b>4337625</b>
MarCator 1086 R	<b>4337621</b>
MarCator 1087 Ri	<b>4337665</b>
MarCator 1087 R	<b>4337661</b>

### Accessories

Measuring heads, ring gages, etc. please refer to page 3-34

### Technical Data

Measuring range mm	Measuring range (inch)	Measuring depth mm	Error limit G* µm / inch	Order no. excludes Indicator
6 - 8	(.25 - .3125")	58 / (133**)	3 / .00015	<b>4487700</b>
8 - 10	(.3125 - .4")	58 / (133**)	3 / .00015	<b>4487701</b>
10 - 12	(.4 - .4725")	58 / (133**)	3 / .00015	<b>4487702</b>
12 - 16	(.4725 - .625")	64 / (139**)	3 / .00015	<b>4487703</b>
16 - 20	(.625 - .775")	64 / (139**)	3 / .00015	<b>4487704</b>
20 - 25	(.775 - 1")	68 / (218**)	3 / .00015	<b>4487705</b>
25 - 30	(1 - 1.2")	68 / (218**)	3 / .00015	<b>4487706</b>
30 - 40	(1.2 - 1.6")	76 / (226**)	3 / .00015	<b>4487707</b>
40 - 50	(1.6 - 2")	76 / (226**)	3 / .00015	<b>4487709</b>
50 - 60	(2 - 2.35")	79 / (229**)	4 / .00016	<b>4487710</b>
60 - 70	(2.35 - 2.75")	79 / (229**)	4 / .00016	<b>4487711</b>
70 - 85	(2.75 - 3.35")	97 / (247**)	4 / .00016	<b>4487612</b>
85 - 100	(3.35 - 4")	97 / (247**)	4 / .00016	<b>4487613</b>
100 - 125	(4 - 4.9")	132 / (282**)	5 / .0002	<b>4487614</b>
125 - 150	(4.9 - 5.9")	132 / (282**)	5 / .0002	<b>4487615</b>
150 - 175	(5.9 - 6.9")	132 / (282**)	6 / .00025	<b>4487616</b>
175 - 200	(6.9 - 7.9")	132 / (282**)	6 / .00025	<b>4487617</b>

\* Indicator is not taken into consideration, over the full length of the anvils

\*\* With the extension 44 Av

## Self-Centering Measuring Pistol Set Micromar 844 AS

Measuring range mm	Number of measuring heads	Ring gages	Order no. with Digital Indicator 1086 R	Order no. excludes Indicator
6 - 12	(.25 - .4725")	3	4487760	<b>4487750</b>
12 - 20	(.4725 - .775")	2	4487761	<b>4487751</b>
20 - 50	(.775" - 2")	4	4487762	<b>4487752</b>
50 - 100	(2 - 4")	4	4487763	<b>4487753</b>

- Supplied with:  
1 Basic Instrument 844 Ag, Measuring Heads 44 Ak, case and ring gages




## Accessories for Micromar 44 A, 44 EWR, 844 A

### Measuring Heads 44 Ak for 44 EWR


- Self-centering measuring head consists of 3 laterally positioned anvils, each are offset at intervals of 120°
- Anvils from 12 mm are carbide tipped
- From 12 mm, anvils can be used to measure to the base of a bore
- From 40 mm all measuring heads are made from aluminum to reduce weight

Measuring range mm			Order no.
(inch)			
6	-	8	<b>4190330</b> <i>(.25 - .3125")</i>
8	-	10	<b>4190331</b> <i>(.3125 - .4725")</i>
10	-	12	<b>4190332</b> <i>(.4725 - .5")</i>
12	-	16	<b>4190333</b> <i>(.5 - .625")</i>
16	-	20	<b>4190334</b> <i>(.625 - .775")</i>
20	-	25	<b>4190335</b> <i>(.775 - 1")</i>
25	-	30	<b>4190336</b> <i>(1 - 1.2")</i>
30	-	40	<b>4190337</b> <i>(1.2 - 1.6")</i>
40	-	50	<b>4190339</b> <i>(1.6 - 2")</i>
50	-	60	<b>4190340</b> <i>(2 - 2.35")</i>
60	-	70	<b>4190341</b> <i>(2.35 - 2.75")</i>
70	-	85	<b>4190042</b> <i>(2.75 - 3.35")</i>
85	-	100	<b>4190043</b> <i>(3.35 - 4")</i>
100	-	125	<b>4190044</b> <i>(4 - 4.9")</i>
125	-	150	<b>4190045</b> <i>(4.9 - 5.9")</i>
150	-	175	<b>4190046</b> <i>(5.9 - 6.9")</i>
175	-	200	<b>4190047</b> <i>(6.9 - 7.9")</i>

Meas. range 6 - 12 mm



Meas. range 12 - 200 mm



### Measuring range


mm	a	b	c	d
6	-	8	1.5	4
8	-	10	1.8	4.3
10	-	12	1.8	4.3
12	-	16	-	6.5
16	-	20	-	6.5
20	-	25	-	9
25	-	30	-	9
30	-	40	-	15
40	-	50	-	15
50	-	60	-	18
60	-	70	-	18
70	-	85	-	23
85	-	100	-	23
100	-	125	-	27
125	-	150	-	27
150	-	175	-	27
175	-	200	-	27

### Ring Gages 355 E

- Can be used for 2 consecutive measuring ranges
- Manufacturing tolerance in accordance to DIN 2250C

dia. mm	Order no.	dia. mm	Order no.
8	<b>4710026</b>	60	<b>4710080</b>
10	<b>4710030</b>	85	<b>4710105</b>
16	<b>4710036</b>	125	<b>4710121</b>
25	<b>4710045</b>	175	<b>4710122</b>
40	<b>4710060</b>		

### Basic Unit 44 EWg

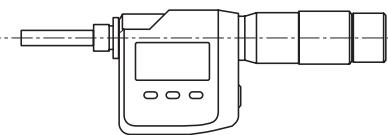


Threaded connection for changing the measuring heads

Measuring range mm	Order no.
6 - 20	<b>4190106</b>
20 - 100	<b>4190107</b>
100 - 200	<b>4190108</b>

### Basic Unit Measuring Pistol 844 Ag


Threaded connection for changing the measuring heads.  
Any indicating instrument with an 8 mm mounting shank can be used.

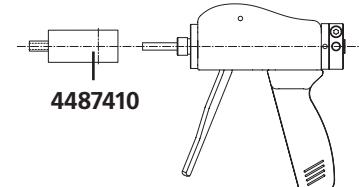

Measuring range mm	Order no.
6 - 100*	<b>4487630</b> <i>(.25 - 4.0")</i>
20 - 100	<b>4487631</b> <i>(.775 - 4.0")</i>
100 - 200	<b>4487632</b> <i>(4.0 - 7.9")</i>

\* Includes adapter 4487410

### Depth Extension Rod 44 Av



Measuring range mm	Length a mm	dia. b mm	Order no.
6 - 12	75	5.8	<b>4190090</b> <i>(.25 - .5")</i>
12 - 20	75	8.5	<b>4190091</b> <i>(.5 - .775")</i>
20 - 30	150	19.0	<b>4190092</b> <i>(.775 - 1.2")</i>
30 - 200	150	22.0	<b>4190093</b> <i>(1.2 - 7.9")</i>

## Depth Micrometer Micromar 45 T



### Applications

- Depth measurement
- Measuring the space between grooves and groove widths (in conjunction with a Disc anvil 45 Tm)

### Features




- Measuring spindle is hardened throughout and ground
- Hardened chrome plated cross beam, the contact surface is lapped
- Hardened anvil
- When using interchangeable extensions recalibrating the depth micrometer is not necessary
- Scales with satin-chrome finish
- Supplied with: Extensions 25 mm and 50 mm, case

### Technical Data

Total measuring range mm	Range of micrometer mm	Readings mm	Spindle thread pitch mm	Error limit with a standard anvil µm	Measuring force N	Length tolerance of extensions µm	Order no.
0-100	25	0.01	0.5	≤5	5 - 10	± 1.5	4180000

*Standard depth measurements*

*With a standard anvil, if necessary with an extension*

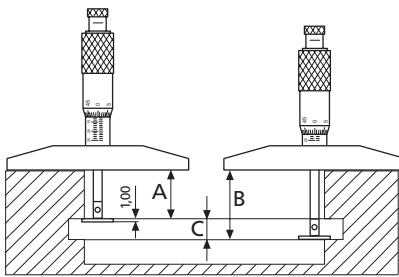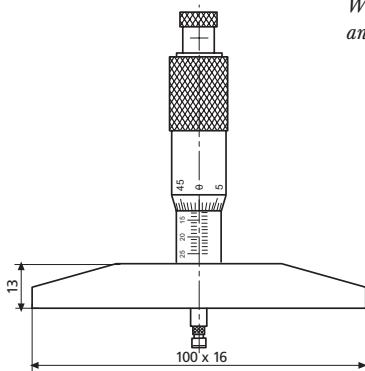

*Dimension A: Can be direct read of the thimble*

*Dimension B: The reading plus 1.00 mm (thickness of the disc anvil)*


*Dimension C:  
Dimension B minus Dimension A*

### Accessories

#### Order no.

**Disc anvil 45 Tm**  
for groove spacing and groove widths

4180011



#### Extensions 45 Tv

Length L	Length tolerance
25 mm	± 1.5 µm
50 mm	± 1.5 µm
100 mm	± 1.5 µm

4180001  
4180002  
4180003

## Digital Micrometer Head Micromar 46 EWR



### REFERENCE

#### Features





**Functions:**  
 0 (Zero setting)  
 ABS (Switch between Relative and Absolute measurement)  
 mm/inch  
 PRESET (enter a numerical value)  
 DATA (Data transmission via connection cable)

- Patented capacitive measuring system with an energy saving function, life of the battery approx. 2 years
- Ratchet with integrated coupler
- Supplied with:  
 Case, end cap (in case the rapid drive is not required) and operating instructions

#### Technical Data

Measuring range		Readings		Error limit $G_{me}$	Measuring face	Mounting shaft	Order no.
mm	(inch)	mm	/ inch	$\mu\text{m}$		mm	
0-25	(0-1")	0.001	/ .00005"	4	flat	12	4184305
0-25	(0-1")	0.001	/ .00005"	4	flat	M12x1*	4184307
0-25	(0-1")	0.001	/ .00005"	4	spherical	12	4184306
0-25	(0-1")	0.001	/ .00005"	4	spherical	M12x1*	4184308

\* with locking nut

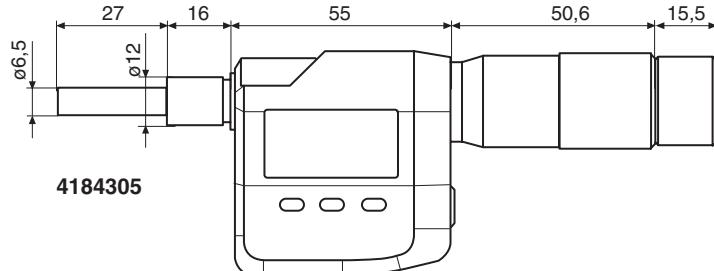

#### Accessories

		Order no.
Battery 3V, type CR 2032		4102520
Data Connection Cable USB (2 m)	16 EXu	4102357
Data Connection Cable Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr	4102410
Data Connection Cable Digimatic (2 m), Flat plug 10-pin	16 EWd	4102915

Accessories for Data Processing see Chapter 11

## Micrometer Head Micromar 46



### Features


- Spindle is made of stainless steel, hardened throughout and ground
- Scales with satin-chrome finish

### Technical Data

	Measuring range mm	Readings mm	Error limit $G_{me}$ $\mu\text{m}$	DIN 863	Spindle thread pitch mm	Spindle dia. mm	Order no.
<b>46</b>	0 - 6.5	0.01	3	●	0.5	3.5	<b>4183021</b>
	0 - 13	0.01	3	●●	0.5	5	<b>4183025</b>
	0 - 25	0.01	3	●●●	0.5	6.35	<b>4183030</b>
	0 - 25*	0.01	3	●●	0.5	6.35	<b>4183024</b>
	0 - 50	0.01	5		0.5	7.5	<b>4183023</b>
<b>46 H</b>	0 - 25**	0.01	3	●	0.5	7.5	<b>4184000</b>


\* with locking nut

\*\* with ratchet, carbide tipped




**4183021**

Measuring range 0-6.5 mm

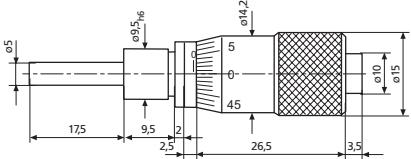


**4183025**

Measuring range 0-13 mm

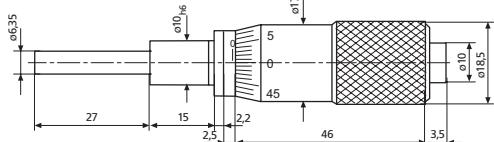


**4183030**

Measuring range 0-25 mm

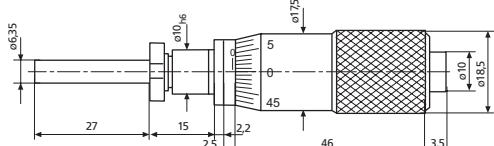


**4183024**

Measuring range 0-25 mm  
with locking nut

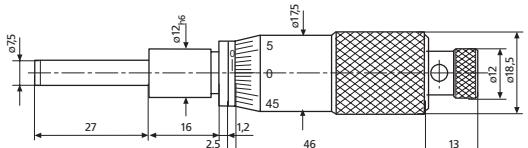

**4184000**

Measuring range 0-25 mm  
carbide tipped

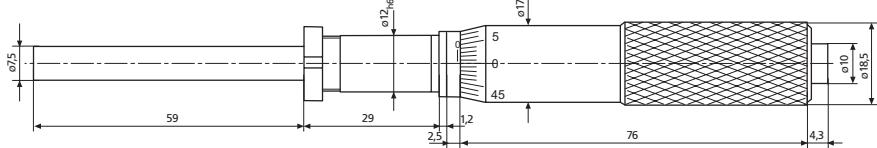

**4183023**

Measuring range 0-50 mm